



INTERNATIONAL ATOMIC ENERGY AGENCY

NUCLEAR DATA SERVICES

DOCUMENTATION SERIES OF THE IAEA NUCLEAR DATA SECTION

GDGraph 5.0 Manual

a tool for digitization of graph image

prepared by

JIN Yongli and CHEN Guochang
China Nuclear Data Center, China Institute of Atomic Energy

August 2013

Note:

The IAEA-NDS-reports should not be considered as formal publications. When a nuclear data library is sent out by the IAEA Nuclear Data Section, it will be accompanied by an IAEA-NDS-report which should give the data user all necessary documentation on contents, format and origin of the data library.

IAEA-NDS-reports are updated whenever there is additional information of relevance to the users of the data library.

For citations care should be taken that credit is given to the author of the data library and/or to the data centre which issued the data library. The editor of the IAEA-NDS-report is usually not the author of the data library.

Neither the originator of the data libraries nor the IAEA assume any liability for their correctness or for any damages resulting from their use.

GDGraph 5.0 Manual

1st Edition- α

JIN Yongli CHEN Guochang

China Nuclear Data Center

China Institute of Atomic Energy

Created: Aug. 26, 2013

Modified:

Contents

1	Introduction	1
2	How to use GDGraph	4
2.1	Installing GDGraph5.0	4
2.2	Starting-up the system	5
2.3	Loading the image file	6
2.4	Setting axes	7
2.5	Reading the data	8
2.6	Reading the error information	9
2.7	Modifying and removing the data	11
2.8	Outputting the numerical data	11
3	Advanced use of GDGraph	13
3.1	Import data function	13
3.2	Project function	19
3.3	Magnifying glass function	21
4	Appendix	23
4.1	How to customize	23
4.2	Data format and Remark	24
4.3	Keyboard shortcuts	27
4.4	ChangeLog	28
	Reference	31

List of Figures

2.1	The interface of starting installation for GDGraph	4
2.2	Starting-up window of GDGraph5.0. You can select "Load Graph File" or "Load Project File" in "File" menu to load a image file or project file. "Settings" function in the "Edit" menu or "Control Panel".	6
2.3	Window after an image loaded. The image is displayed on the main panel with original size.	7
2.4	Window after setting axes. There exist squares on the axes to pull it to proper position.	8
2.5	Window after reading the data points. The cross lines is help user to confirm the position of data point.	9
2.6	Window after reading the error information. Four squares around the data point is assist user to digitizing it. And X-Y errors can be digitized in symmetry or asymmetry mode.	10
2.7	An example of outputting numerical data file. It contains 6 data column of each data group, and the first two lines contains the group information and data type.	12
3.1	Load a "Import data" file for comparison.	14
3.2	The procedure of imported data (1). Display the information of data file.	14
3.3	The procedure of imported data (2). Set different labels for indicate the symbol as different contents in the data file. These labels is optional setting.	15

3.4	The procedure of imported data (3). Choose or fill in a separator for each partial contents, or fill the fixed column number for the actually importing contents.	15
3.5	The procedure of imported data (4). The first three lines contain the "Data type", "Title" and "Operate" for each column data. User can confirm and modify above three lines information.	16
3.6	The procedure of imported data (5). To operate a whole column data using a expression, and the calculation result is appear a new window. .	16
3.7	The procedure of imported data (6). Successfully import a group data and compare with the digitizing data point and image. The method of operation the import data point is the same as the digitizing one. . . .	17
3.8	Window of magnify glass function. Magnify the partial image area, and the size of this window and magnified times can be set at "Setting" function.	22
4.1	Window of "Setting" function. User can set the shape, size and color of data point, output data format, magnifying window, magnified times etc.	24
4.2	Window of setting shape, color and size of data point.	24
4.3	Set the data format and output example.	25
4.4	Window of "Remark" function for filling some text of memo.	26

Chapter 1

Introduction

For 30 years, China Nuclear Data Center (CNDC) has been accumulating neutron and charged particles induced reaction data as EXchange FORmat (EXFOR) data files.

The evaluators and experimenters always desire to have full and latest experimental data sets. However, the data are often published as figures without numerical values for some publications or journals. Furthermore, the quality of figures is not always good enough, especially for some figures scanned from the hard copy of old publications. In the other hand, the researchers would like to retrieve the data directly from EXFOR database. Digitization of figures is only one method to obtain the numerical data and correlative uncertainty, when there are only figures available from publications. Therefore need a digitization software to fit the requirements from evaluation, measurement and EXFOR compilation in CNDC.

Before 2000, there was no common software to digitize experimental and evaluated data. And the quality of digitization results can not fit the requirements of evaluation and measurement using the traditional coordinate paper (plotting paper) or rule. The end of twenty century, the personal computer was developed so quickly that to develop a software for digitization purpose become possible. Since 1997, CNDC devotes to develop a software for digitization. The first version of digitization software GDGraph was developed and released in 2000 using VC++ language. Although, the functions of the 1st version of GDGraph is fit the basic requirements of digitization only, in which can digitize one group data excluding data error, BMP image format only, and it can

not randomly delete digitizing points. However, the mold of GDGraph software can obtain higher quality digitizing results and high efficiency than the traditional way.

Five years later, collected much feedback information on update and bugs of this software. The 2nd version of GDGraph software was released at 2006, in which the whole software was re-written using Perl computer language to obtain more comfortable conditions for programming and updating. The version 3.0, 4.0 and 5.0 of GDGraph is released at 2011, 2012 and 2013, respectively.

The software GDGraph5.0, described in this paper is used for reading the numerical data from an image file. Main features of GDGraph5.0 is listed below:

- Operating system: WindowsXP or Windows higher versions OS.
- Intuitive and light GUI: Provide Chinese and English version GUI. The GUI type is changed from "Dialogue" to SDI (Single document interface).
- Supports image format: such as PNG, GIF, BMP and JPEG etc.
- The image can be automatically fit to the GUI window according to your screen resolution, and zoom-in or zoom-out manually together with the digitizing X, Y axis.
- Allow to rotate the image and set a rotation angle with degree unit. So the digitizing axis can fit well with the image one.
- The image size is reverted to the original one, if it was been zoom-in or zoom-out.
- The maximum digitizing data group number is three, and the color, size and shape of each group can be defined by user using "Settings" function.
- Randomly add the digitizing point and move it by mouse or cursor keys.
- Output data can be saved as a data file or at clipboard. And the digit number of output data can be defined by user.
- Import data function is enable to reuse the former digitizing data or compare with other data group easily.
- X, Y axes: Select or set a unit for X, Y data by user is available for identification the contents of each column.
- Allow to digitize X, Y error with symmetry or asymmetry mode and move it using mouse or cursor keys, and set a fix value as X, Y error with relative (%), in

percent) or absolute mode.

- Load an image by menu or directly paste from clipboard.
- Allow to select thin or thick line for axis, data point symbol and error bar etc.
- Magnifying glass function: It magnify the local area of the image, and the window size can be set from 100% to 800% and move it by mouse. The partial image in the magnifying glass window can be magnified 2 or 4 times.
- Setting the color, size and shape of data point, the background with or without gridding lines and its distance, output digitizing numerical data format is available.
- Project function is used to save image, digitizing results, axes together with other settings for checking, correction, modification in the future. The default extension file name is "gdp".
- Remark function is applied to keep some marks and memo text for checking, modification and memory by user.
- Using shortcut key to select the active point by "PageUp" or "PageDown" as previous or next point.

This document describes how to use the numerical data reading software, GDGraph5.0^[1] released in Apr., 2013. The contents of this document are shown as follows: Chapter 2 gives the basic usage of GDGraph5.0, such as starting-up and reading the numerical data from the graphical data. Chapter 3 describes the more sophisticated functions, such as, setting function, import data function, magnifying glass function and project function. Section 4.1 gives how to customize GDGraph5.0. Section 4.2 describes the output data format treated in GDGraph5.0. Keyboard Shortcuts and the changes from last version of GDGraph are described in the Section 4.3 and 4.4.

***IMPORTANT: PLEASE USE THIS SYSTEM AT YOUR OWN RISK.
IT IS NOT ALLOWED TO USE THIS SYSTEM FOR ANY KIND OF
BUSINESS PURPOSE.***

Chapter 2

How to use GDGraph

2.1 Installing GDGraph5.0

Recently GDGraph5.0 can be used in WINDOWS operation system only such as WindowsXp or Windows higher version OS. To download the installation file "GD-Graph5.0.msi" from the website as <http://www.nuclear.nsd.c.cn/gdgraph>.

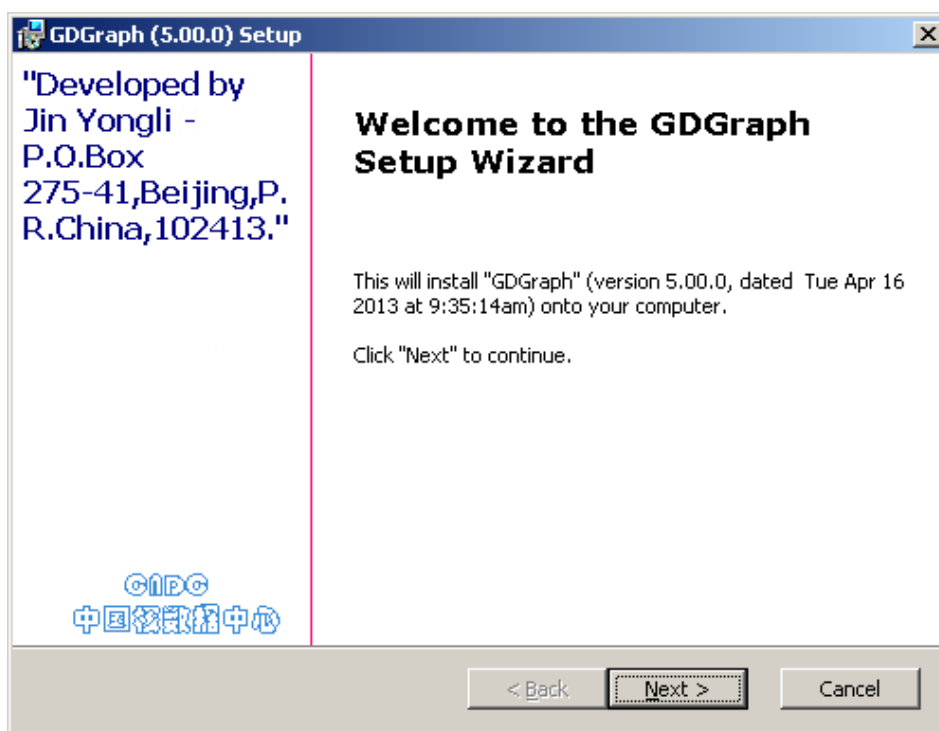


Figure 2.1 The interface of starting installation for GDGraph

Now you can double clicks "GDGraph5.0.msi" file to start install GDGraph in your computer, the interface of installation is shown in Figure 2.1. Click "Next" button to continue install. The "Custom" mode of installation allows to choose the installation directory, and the "Install" mode use the default installation directory as "C:\Program Files\CNDC\GDGraph\". You can find the short cut execution link at Windows start program menu as "CNDC" or you can have a shortcut link at desktop. Now you are ready to start and use GDGraph5.0.

Note: We do not recommend to install GDGraph5.0 at system partition (usually name as "C:") in Windows7. Otherwise, you can not allow to load the sample files such as project file, numerical data file for testing import function from system partition without administrator privileges. In other hand, you can use Windows7 start menu "run as administrator" to start GDGraph5.0, then load the sample files from system partition.

2.2 Starting-up the system

Let's start GDGraph5.0 by double-clicking the "GDGraph" at desktop. When GDGraph starts, you would see the window shown in Figure 2.2.

The window of GDGraph5.0 contains four main components: menu bar, control panel, navigation bar and main panel. Menu bar provides menus to operate GDGraph5.0 and set some optional parameters. Control panel contains functions required to read data, such as setting data group, axe mode, fix value of X Y error and its modes, image rotation angle, adding new data point, magnifying glass function, short-cut setting parameters and operation error bar etc. Navigation bar contains buttons to magnify the image, rotate image according to the setting angle value, fit the image size to the main panel and show the image with original size. An image loaded from a file is displayed on the main panel. The digitizing data is on this panel.

GDGraph5.0 can be operated using a keyboard, but in this document, how to operate the menu bar and the control panel by a mouse is explained in detail. Keyboard shortcuts are shown in Table 4.1 at Appendix 4.3.

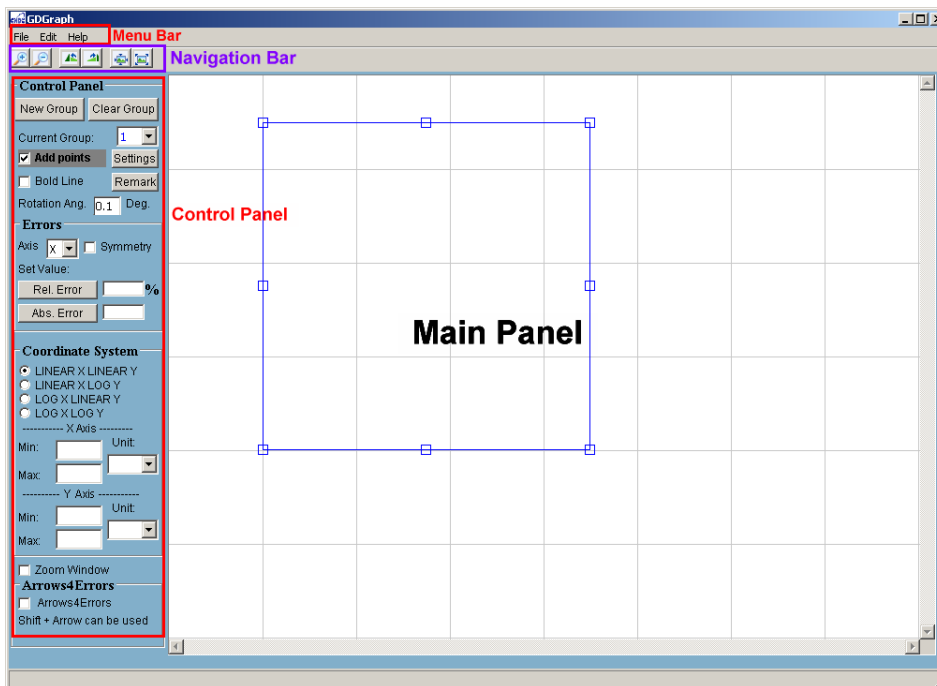


Figure 2.2 Starting-up window of GDGraph5.0. You can select "Load Graph File" or "Load Project File" in "File" menu to load a image file or project file. "Settings" function in the "Edit" menu or "Control Panel".

2.3 Loading the image file

You have some options to load an image file. One is using "Load Graph File" from the "File" menu in the menu bar. Select an image file (such as PNG, GIF, BMP or JPEG) from a file dialog box in a new window and the image with original size is default. Another one can directly copy an image using clipboard from other file such as MS Word, PDF, etc. If the image file is successfully loaded, the image is displayed on the main panel as shown in Figure 2.3. The sample image used in this document was made from experimental data in Fig 3 of Nucl. Instrum. Methods Phys. Res. B 269 (2011) 2032.

To enlarge the size of the main panel, please maximize the window of GDGraph5.0. The main panel expands and shrinks automatically to fit the size of GDGraph5.0 window.

If you want to zoom in and out the image, please use the "Zoom in" or "Zoom out" button at "Navigation Bar". To fit the image size with the main panel, use the "Fit

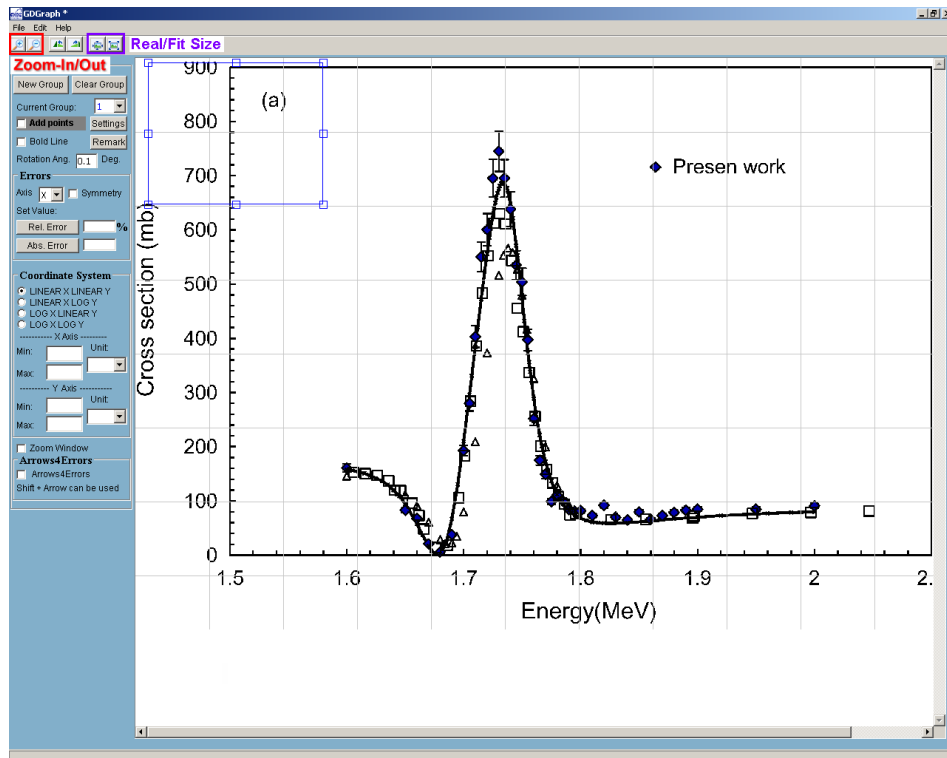


Figure 2.3 Window after an image loaded. The image is displayed on the main panel with original size.

Size” button at ”Navigation Bar”. Use the ”Real Size” button at ”Navigation Bar” to revert the image to original size. You can also magnify partially area using ”Zoom Window” function at ”Control Panel”.

2.4 Setting axes

Use cross lines to set the X-Y axes of image, and adjust the square symbols of the starting, middle and ending positions of X-Y axes to fit the image one. Then select the X-Y axes type as Linear-Linear, Linear-Log, Log-Linear and Log-Log. According to the cross line positions, fill in the starting and ending value of X-Y axes, and select or fill in unit for X-Y axes at ”Coordinate System” in ”Control Panel”, respectively.

If you want to move the starting or ending position of one axis, pull the point to proper position. If you want to move one axis, pull the middle point between starting and ending point to proper position. Move the starting or ending point or whole axis

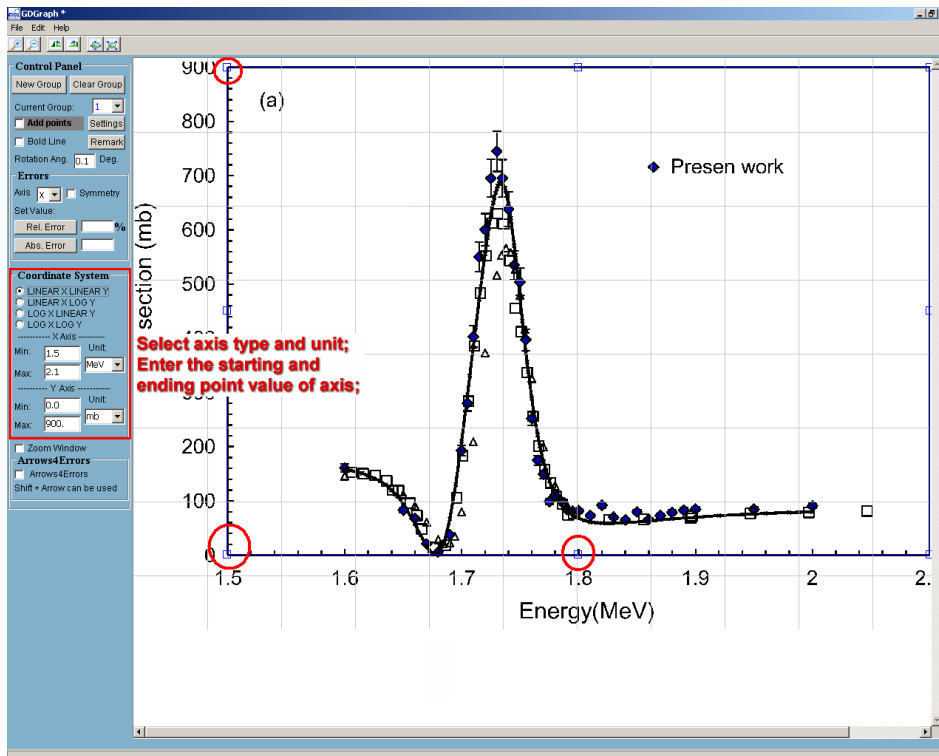


Figure 2.4 Window after setting axes. There exist squares on the axes to pull it to proper position.

by a mouse. When we set or adjust the positions of axis, there exist an orthogonal cross lines to assist confirming the position of axes. When you finish setting the axes, you will see a window shown in Figure 2.4.

Note: Sometimes the image is not right rectangle, please use the rotation function at "Navigation Bar" to adjust it before starting to set the axes.

2.5 Reading the data

You are ready to read data if you finish setting the axes. Activate the check box "Add points" at "Control Panel" to enter the data input mode. If there have existed more than one group digitizing data, please select which group you want to add new points or modify the original digitizing results. If you click on the image in the data input mode, a data point is added on the image, which is default with blue in color and circle in shape for the 1st group data points. You can add another point by clicking

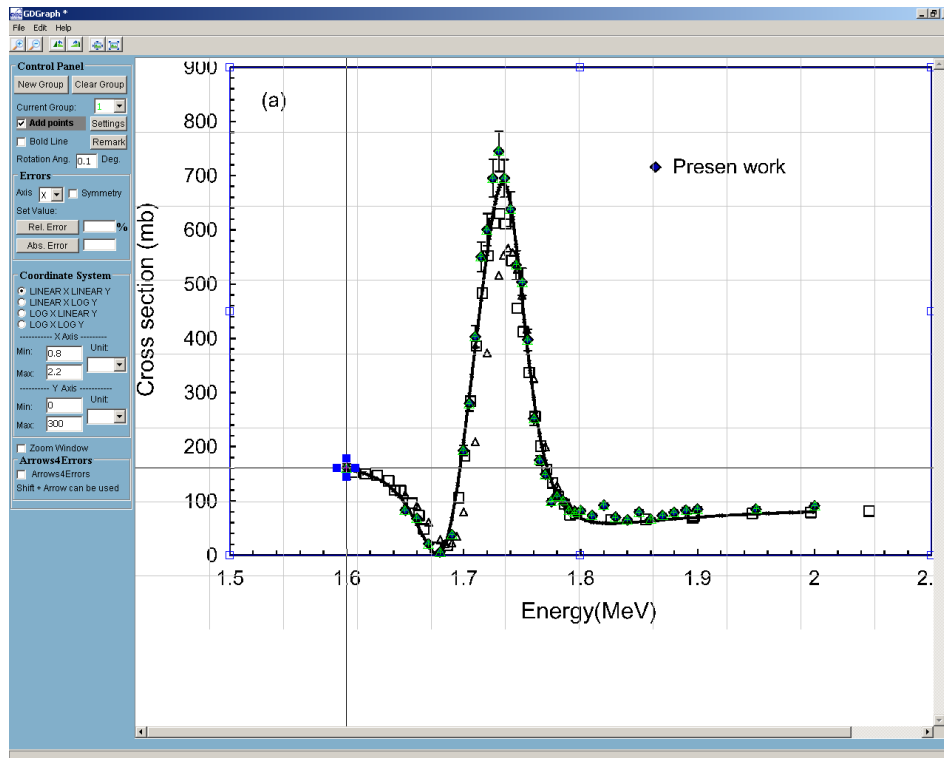


Figure 2.5 Window after reading the data points. The cross lines is help user to confirm the position of data point.

another place. Continue to click the image until all the data points are added or pull the error bar after reading a data point. This mode is canceled by clicking the "Add points" check box again. When you finish adding the data points, you will see a window as shown in Figure 2.5. If you modify or remove the data, please refer to Section 2.7 ("Modifying and removing the data").

You can configure the shape, size and color of different digitizing group data point using "Settings" function, please refer to Appendix 4.1.

2.6 Reading the error information

This section gives how to read error information. First of all, disable the "Add points" mode by taking out the "√" at "Add points" check box. Then, please select the error mode of X-Y with asymmetric or symmetric. The default error mode of X-Y is asymmetric. To set a symmetric error for X or Y, first select X-axis or Y-axis at

"Axis" list box in "Errors" part at "Control panel", then click "Symmetric" check box. After that, click a data point to activate it which will appear 4 red square symbols around it. In this mode, it allow to move data point by mouse or cursor keys or set X-Y error. The left and right square symbols indicate X-Err-/X-Err+, and the bottom and top symbols indicate Y-Err-/Y-Err+. If you obtain the information of X-Y uncertainty from paper or other ways, you can directly fill in a fix value as X-Y uncertainty with relative (% , in percent) or absolute mode. All of those setting can be realized using "Errors" part at "Control Panel". You can directly use mouse to pull one of four red squares to obtain X-Y error. On the other hand you can apply "Arrows4Errors" function at "Control Panel" to realize using cursor keys to move one of four red squares to proper position.

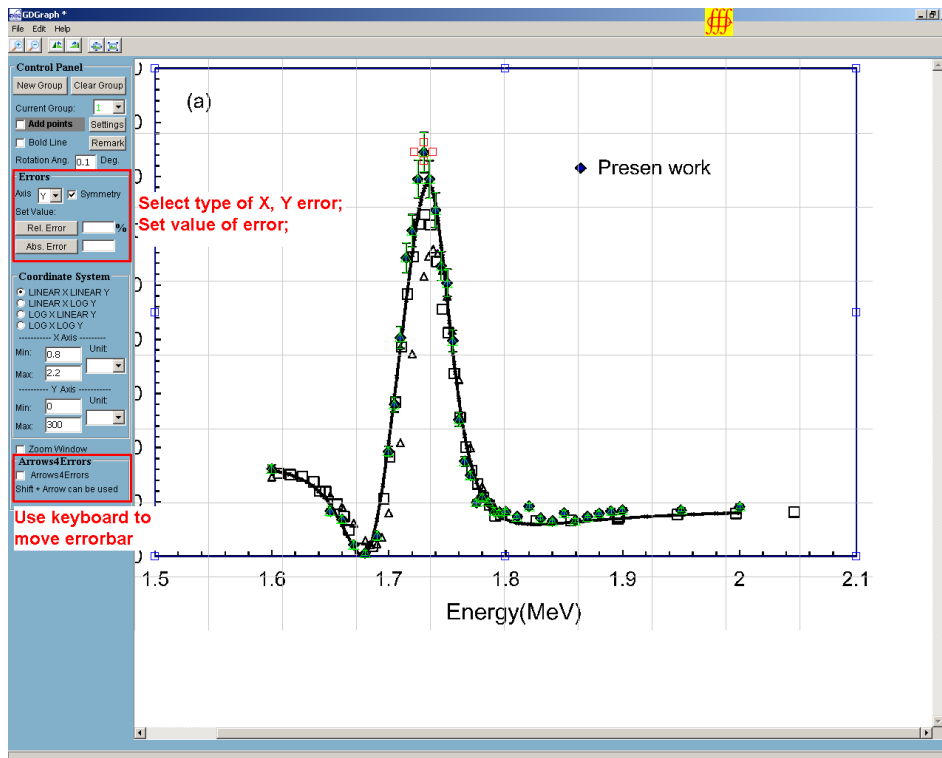


Figure 2.6 Window after reading the error information. Four squares around the data point is assist user to digitizing it. And X-Y errors can be digitized in symmetry or asymmetry mode.

After setting the error of a data point, randomly select the next point using a mouse or "PageDown" or "PageUp" key to select next or previous points to set error. When

the point is specified, there exist 4 red squares around it again, and you can pull error bar in the same way as mentioned above. Repeat operations until you finish setting error for all the data. To exit error input mode, click the area out of data points. After inputting errors, you will see a window as shown in Figure 2.6.

2.7 Modifying and removing the data

This section explains how to modify and remove the data.

(1) Modifying the position of data points, error bars, and axes

In order to modify a data, activate the data point by clicking it at first. Selected point will appear 4 red squares. Then use a mouse or cursor keys to move it at a proper position. If you want to modify the error bar, you can use a mouse to pull or cursor keys to move one of four red squares to a proper position. For axes, use mouse to pull the squares in the axes to a proper position.

(2) Removing data points and error bars

In order to remove a data point, activate the data point to remove. Then press Right-click on the selected point, there will appear "delete" selection and the information on the relative position with axes and the digitizing point X Y values, then you can use "delete" to remove the selected point. If you want to remove or delete whole data group, please select which group data you want to remove at first, then click "Clear Group" button at "Control Panel" to realize it. To remove an error bar, click and move the endpoint of the error bar to the center of point. In other hand, if you want remove all errors, you can set 0.0 value at "Errors".

2.8 Outputting the numerical data

When you finish reading data, select "Save Data File" from the "File" menu or directly use "Ctrl+C" to copy all digitizing data to clipboard and paste to other applications. The output data is in exponent or float format, and the number of digit can be set at "Settings" function in the "Edit" menu or "Control Panel". Specify file name in the file dialog in a new window. Each data can be set as 11 columns to fit

EXFOR format requirements. The output file contains the information of each group No., number of data points, name of each column and digitizing data. Each group data output contains X, Y, Y-Err+, Y-Err-, X-Err-, and X-Err+ as shown in Figure 2.7.

0	10	20	30	40	50	60	70
1	!#####group 1 #####(39 points) #####						
2	!#	X(MeV)	Y(mnb)	dY+	dY-	dX-	dX+
3	1.03415E+00	5.34411E+01	2.63429E+00	2.63429E+00	0.00000E+00	0.00000E+00	
4	1.15063E+00	2.73492E+01	3.13606E+00	3.13606E+00	0.00000E+00	0.00000E+00	
5	1.17425E+00	2.24569E+01	2.38340E+00	2.38340E+00	0.00000E+00	0.00000E+00	
6	1.19746E+00	6.65120E+00	2.50884E+00	2.50884E+00	0.00000E+00	0.00000E+00	
7	1.22109E+00	1.63351E+00	1.63075E+00	1.63075E+00	0.00000E+00	0.00000E+00	
8	1.24430E+00	1.22961E+01	2.88517E+00	2.88517E+00	0.00000E+00	0.00000E+00	
9	1.26751E+00	6.41037E+01	3.13606E+00	3.13606E+00	0.00000E+00	0.00000E+00	
10	1.27932E+00	9.30809E+01	4.51592E+00	4.51592E+00	0.00000E+00	0.00000E+00	
11	1.29073E+00	1.34100E+02	6.77388E+00	6.77388E+00	0.00000E+00	0.00000E+00	
12	1.30294E+00	1.83274E+02	9.15728E+00	9.15728E+00	0.00000E+00	0.00000E+00	
13	1.31435E+00	1.99958E+02	1.00354E+01	1.00354E+01	0.00000E+00	0.00000E+00	
14	1.32616E+00	2.31695E+02	1.15407E+01	1.15407E+01	0.00000E+00	0.00000E+00	
15	1.33780E+00	2.48260E+02	1.20897E+01	1.20897E+01	0.00000E+00	0.00000E+00	
16	1.34937E+00	2.31569E+02	1.16661E+01	1.16661E+01	0.00000E+00	0.00000E+00	
17	1.36118E+00	2.12627E+02	1.07880E+01	1.07880E+01	0.00000E+00	0.00000E+00	
18	1.37258E+00	1.78256E+02	8.90640E+00	8.90640E+00	0.00000E+00	0.00000E+00	
19	1.38480E+00	1.67719E+02	8.53007E+00	8.53007E+00	0.00000E+00	0.00000E+00	
20	1.39539E+00	1.32093E+02	6.77388E+00	6.77388E+00	0.00000E+00	0.00000E+00	
21	1.40802E+00	8.37982E+01	4.26504E+00	4.26504E+00	0.00000E+00	0.00000E+00	
22	1.41860E+00	5.79571E+01	2.88517E+00	2.88517E+00	0.00000E+00	0.00000E+00	
23	1.43082E+00	4.94270E+01	2.50884E+00	2.50884E+00	0.00000E+00	0.00000E+00	
24	1.44304E+00	3.27432E+01	1.63075E+00	1.63075E+00	0.00000E+00	0.00000E+00	
25	1.45404E+00	3.60047E+01	2.13252E+00	2.13252E+00	0.00000E+00	0.00000E+00	

Figure 2.7 An example of outputting numerical data file. It contains 6 data column of each data group, and the first two lines contains the group information and data type.

Chapter 3

Advanced use of GDGraph

Some functions were implemented in GDGraph to read the numerical values more easily and improve the quality of the digitized data.

- Import data function: Section 3.1.
- Project function: Section 3.2.
- Magnifying glass function: Section 3.3.

3.1 Import data function

This section explains the import data function. Import data function is a function to load the numerical data from files and plot them directly on the image on the main panel. The import data function enables us to reuse the data easily and check the data accuracy in greater detail. On the other hand, you can compare other data group with the digitizing image and data.

In order to use the import data function, please set and confirm axes at first, then use "Import Data" function at the "File" menu.

How to load a data file is as following:

- The digitizing data is compared with the original image.

First of all, please pull the axis line to fit the image and set the axes values. Otherwise, the import data will display unreasonable position or refuse to import data. After setting axes, use "Import Data" from the "File" menu to load a data file.

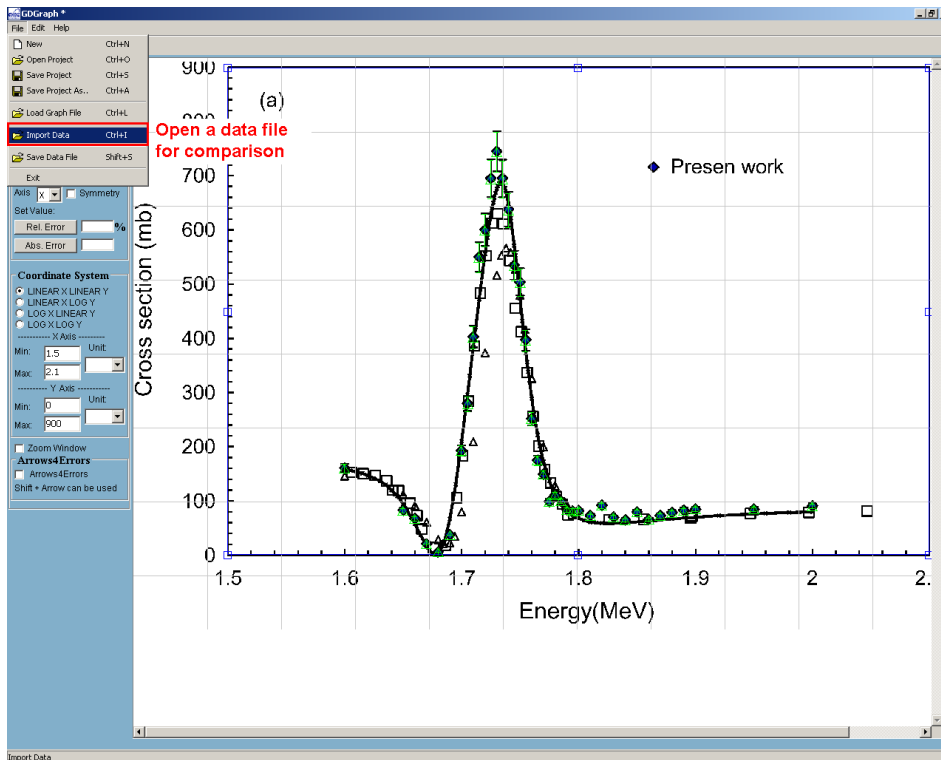


Figure 3.1 Load a "Import data" file for comparison.

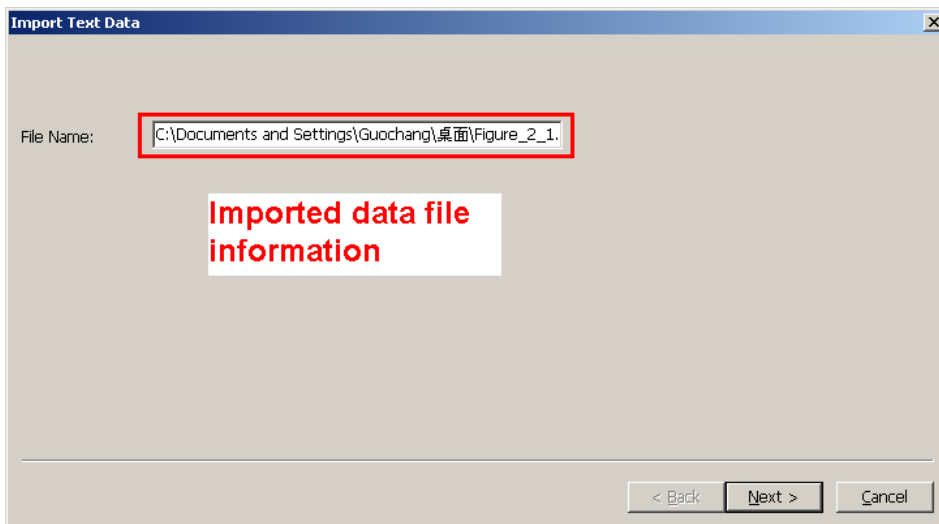


Figure 3.2 The procedure of imported data (1). Display the information of data file.

- There exist more than one group data in the main panel.
First of all, please check and confirm the axes setting as above also. Then, click "New group" in "Control Panel" to create a new group No. for the import data.

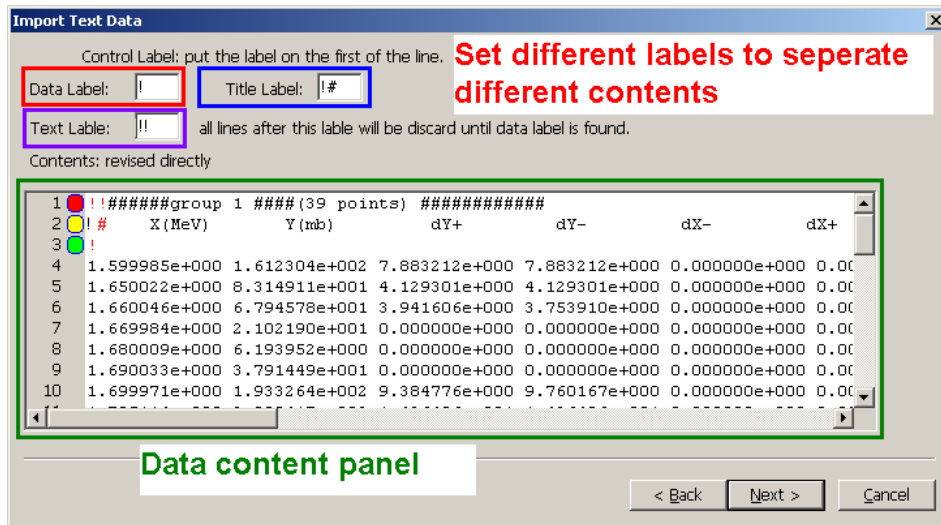


Figure 3.3 The procedure of imported data (2). Set different labels for indicate the symbol as different contents in the data file. These labels is optional setting.

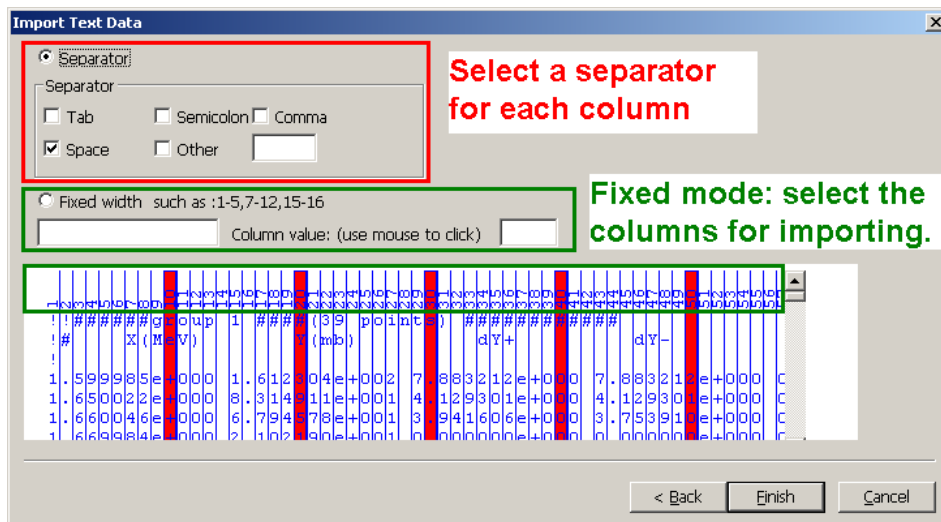


Figure 3.4 The procedure of imported data (3). Choose or fill in a separator for each partial contents, or fill the fixed column number for the actually importing contents.

After that, use "Import Data" from the "File" menu to load a data file.

The procedure of import data file is as following:

- Pull axis lines and set the X-axis and Y-axis values as Section 2.4;
- Set a new group number for import data using "New Group" button at "Control Panel";

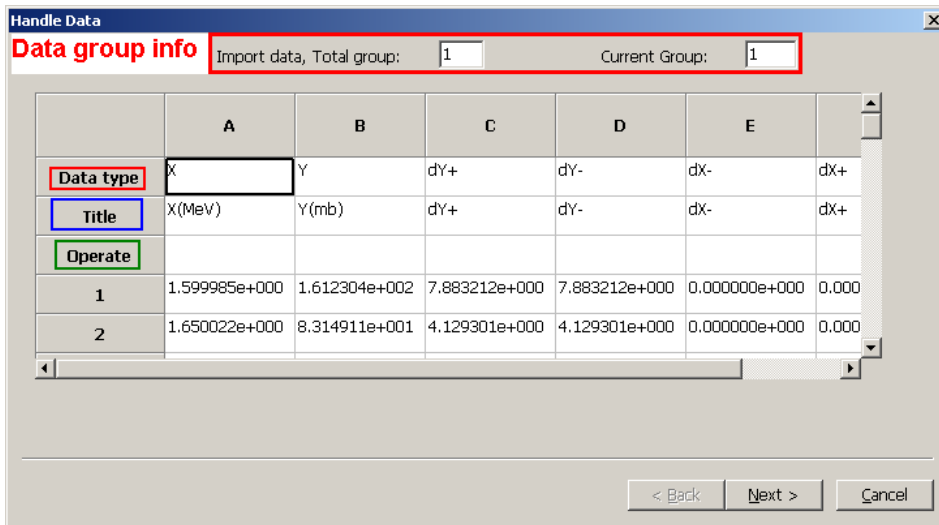


Figure 3.5 The procedure of imported data (4). The first three lines contain the "Data type", "Title" and "Operate" for each column data. User can confirm and modify above three lines information.

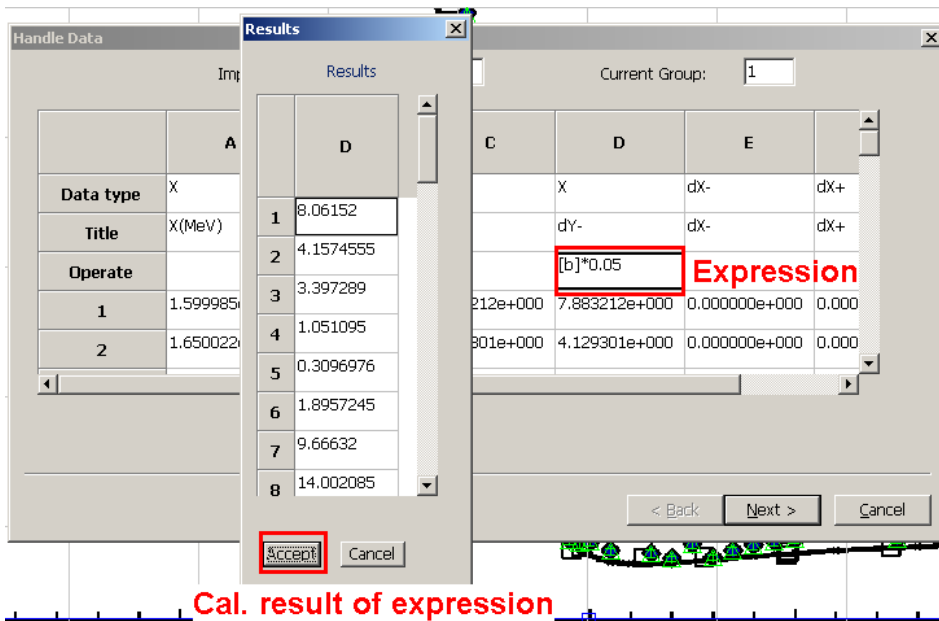


Figure 3.6 The procedure of imported data (5). To operate a whole column data using a expression, and the calculation result is appear a new window.

- Use "Import Data" from the "File" menu to open a data file as shown in Figure 3.1;
- After select a data file, GDGraph load data information at memory and show file

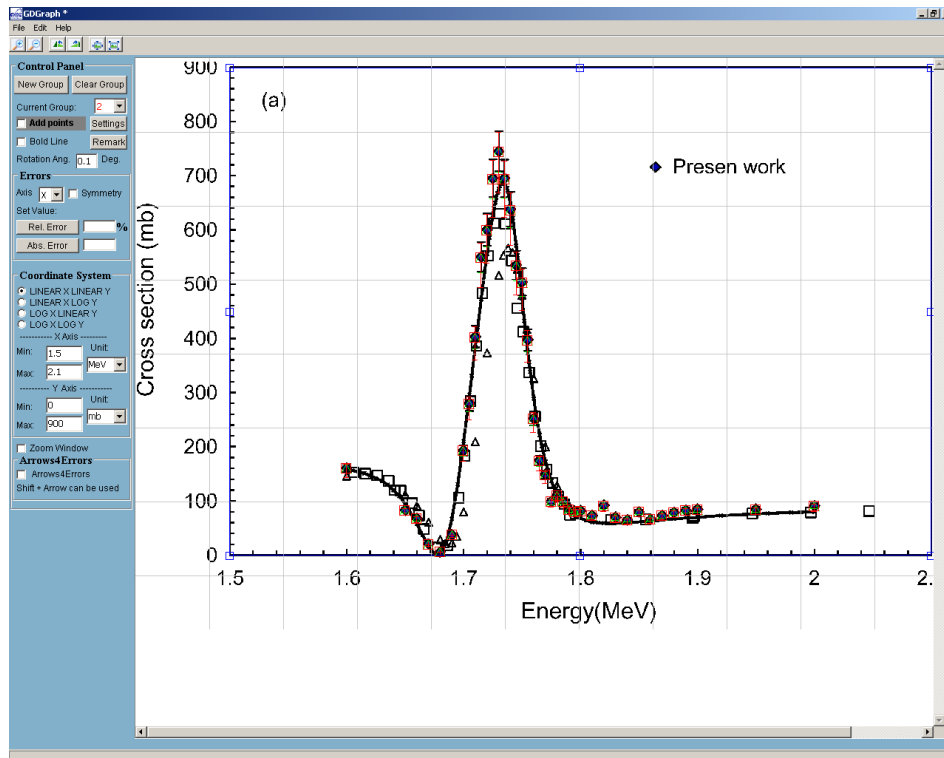


Figure 3.7 The procedure of imported data (6). Successfully import a group data and compare with the digitizing data point and image. The method of operation the import data point is the same as the digitizing one.

information as Figure 3.2;

- Click "Next" button to continue importing data, there will appear a new window as Figure 3.3. According to the detailed contents of data file and the habit of users, three optional identifying control parameters can be set to represent different contents and control labels by yourself. You also can omit one or all of these three optional parameters, when the data file only contains numerical data. These three optional parameters indicate as three labels such as "Text Label", "Title Label" and "Data Label", respectively. The more detailed information on three parameters is as following.

- 1) "Text Label": It is start the contents of comments and memo until there exist one of other two labels such as "Title Label" and "Data Label". The head of first line of this part have a red point at data content panel, if it is used.

- 2) "Title Label": It is the detailed contents or meaning of each column data, which also indicate the user the contents of each data column. The head of first line of this part have a yellow point at data content panel, if it is used.
 - 3) "Data Label": Actual data contents is listed after this label. The head of first line of this part have a green point at data content panel, if it is used.
Note: You define a label as "Data Label" at this window, however in the actual data contents does not exist this "Data Label", GDGraph will omit "Data Label" and treat the contents as data after "Title Label".
 - 4) You can operate the imported information at data contents panel as add, delete, modify, copy, paste, undo and redo etc.
- Click "Next" button to continue importing data, there will appear a new window as Figure 3.4. According to the imported data format, you can choose one type of separators to distinguish different partial contents, and you also can specialize a separator by yourself. On the other hand, you can select partial contents from whole data, and fill in the column range for each partial contents and separate with comma such as "1-13,15-27,29-41" to represent X, Y, and Y error, which column contents will be imported.
Note: "Column value" is help user to identify the column range, and use Left-click key to obtain the column number information.
 - Click "Finish" button to continue importing data, there will appear a new window as Figure 3.5. There inform the total and current group number, and exist three labels to represent as the beginning three lines such as "Data type", "Title" and "Operate", respectively. You can operate and edit each column at this window. More detailed information on the beginning three labels is as following.
 - 1) "Data type": It represent the data type as X, Y and their errors etc. You can confirm, edit or reset a proper name of each column at this window. GDGraph will accord this setting to reconstruct X, Y and their errors. And you also can disable whole column data using "Discard" option.
 - 2) "Title": It is the same contents as its after "Title Label" at last window, and can be manually modified and corrected by user.
 - 3) "Operate": It allow user to operate whole column data using a expression as

$[c] = [b]*0.05$ or directly omit the active column as $[b]*0.05$. It includes some functions such as " $\cos(\theta)$ ", " $\sin(\theta)$ " etc. The detail of functions are included in GDgrapg5.0 as list in Table 3.1. When you finished filling the expression, then press keyboard "Enter". A new window appear the calculation result using the expression as shown in Figure 3.6. To click "Accept" button to adopt the calculation result, otherwise the column data will keep the original one.

- Click "Finish" button to finish importing data procedure as shown in Figure 3.7.

You can import another group data in the same way as mentioned above. You also can operate the import data and its errors at main panel as the digitizing data point.

Tips: How to import data quickly. If the data file contains numerical data only with regular format using different column represent X, Y and X-Y error. You just need to press the "Next" button to import the data.

3.2 Project function

This section explains the project function. It is a function to save and load whole information of digitization including original image, digitizing data, all settings, memo information etc. The project function enables us to pause, stop, continue, review, correct and modify the digitizing work at any time. So the digitizing work needn't to finish immediately or at the same time, and it is become easy and comfortable to check, modify and correct digitizing results. This function is similar to "Import data function", but it needn't to set some parameters and import data from file. You can directly double click the project file icon, GDGraph will automatically open or load this project file, and the whole information is the same as the original digitizing condition. On the other hand, you also can open a old project file with "Open Project" in "File" menu. If you want to stop or pause you digitizing job, it will restart in the future, you can save the whole information as a project file using "Save Project" in "File" menu. The extension file name of project file is default as "gdp". You also can save the project file with other extension name as you prefer.

Table 3.1 The operators and functions include in Import function

Operation	Key
Operators	$+$, $-$, $*$, $/$, $**$
Functions	
<code>abs([x])</code>	absolute value of x
<code>sqrt([x])</code>	square root of x
<code>log([x])</code>	$\log_e x$, natural logarithm (base e) of x
<code>exp([x])</code>	e^x , exponential function of x
<code>sin([x])</code>	sine of x , x in radian
<code>cos([x])</code>	cosine of x , x in radian
<code>tan([x])</code>	tangent of x , x in radian
<code>deg2rad([x])</code>	convert angle from degree to radian
<code>rad2deg([x])</code>	convert angle from radian to degree
<code>asin([x])</code>	inverse sine, $\sin^{-1}(x)$
<code>acos([x])</code>	inverse cosine, $\cos^{-1}(x)$
<code>atan([x])</code>	inverse tangent, $\tan^{-1}(x)$
<code>sinh([x])</code>	hyperbolic sine, $\sinh x$
<code>cosh([x])</code>	hyperbolic cosine, $\cosh x$
<code>tanh([x])</code>	hyperbolic tangent, $\tanh x$

(1) x : It denotes column No. such as A, B, C ect.

(2) **Note:** The expression have lower letter limitation.

3.3 Magnifying glass function

Using magnifying glass function, you can enlarge the figure partially. Select check box "Zoom Window" at "Control Panel", then the active point will be magnified at a new window according to the parameters of "Settings". In this window, enlarged image is shown in Figure 3.8. You can move this window by dragging. It magnify the local area of the image, and the window size can be set from 100% to 800%. The data point in the magnifying glass window can be magnified 2 or 4 times, which all of these parameters can be set at "Settings". If you double click this window or unselect "Zoom Window", the magnifying glass window will disappear. If you want to fix the magnifying window at one position and move the display image, you can use four triangle symbols around the window to move the magnifying image area. It encourage user to use a high-resolution image and high magnified times for digitizing, you can use the four arrow symbol around the window to move the magnifying image area, if the error bar is out of the magnifying window, and the active point is in this window.

Warning: You can not directly modify the active data point in this window. This window is only display the magnifying image. If you want to modify data point or error, please use the method is descibed at Chapter 2.

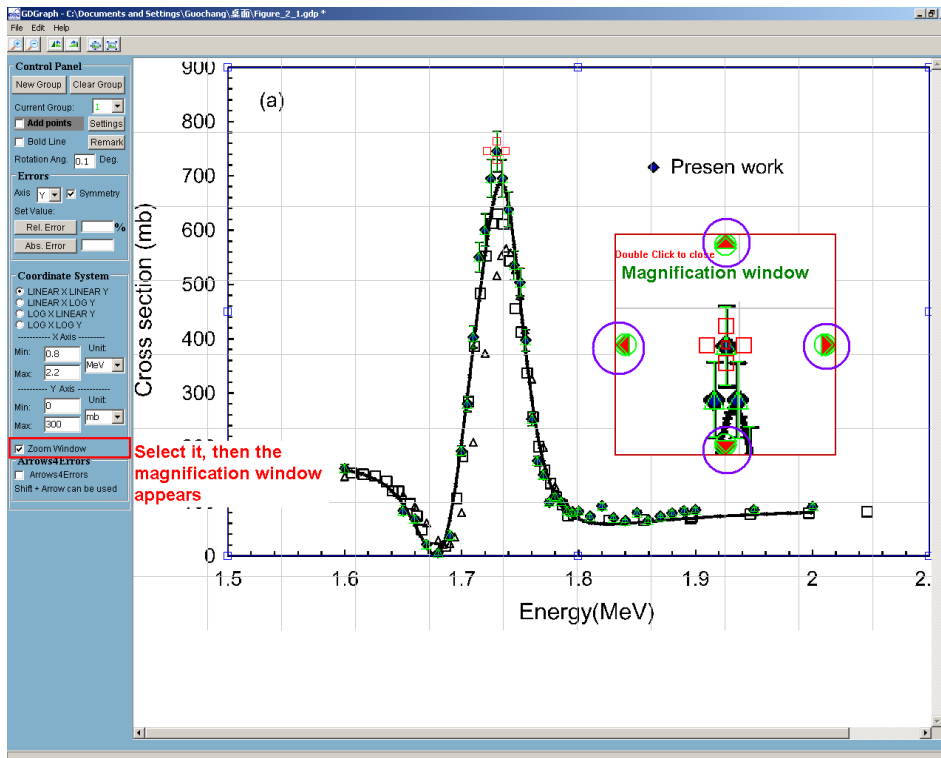


Figure 3.8 Window of magnify glass function. Magnify the partial image area, and the size of this window and magnified times can be set at "Setting" function.

Chapter 4

Appendix

4.1 How to customize

This section explains how to customize GDGraph5.0. Apply "Settings" in the "Edit" menu or directly click "Settings" button at "Control Panel", there will appear a new window for setting some digitizing parameters, such as the shape, size, and color of digitizing point, magnifying window size, magnified times of partial image, the cross line length of error bar, the background of main panel with or without gridding line and its distance, output data format as shown in Figure 4.1.

There display three group data point characters at "Settings" window. According to your digitizing situation, you can change one of three group data point shape, color and size. Double click the shape, color or size, which group data point character will be setting, and appear a new window as Figure 4.2. You can select one of five kinds symbol, and set the size and color of point. After setting, the setting results appear at the main setting window. If you want to set different color for different group data, you should click "Color" button, then select one of basic color or set the RGB value by yourself.

You can set the size of magnifying window from 100% to 800%, and the magnified times of partial image is from 200% to 400%. There have an option to select a background with or without gridding line and its distance. It is an assistant function for comparing the digitizing axes or error bar line. The background with gridding line is default.

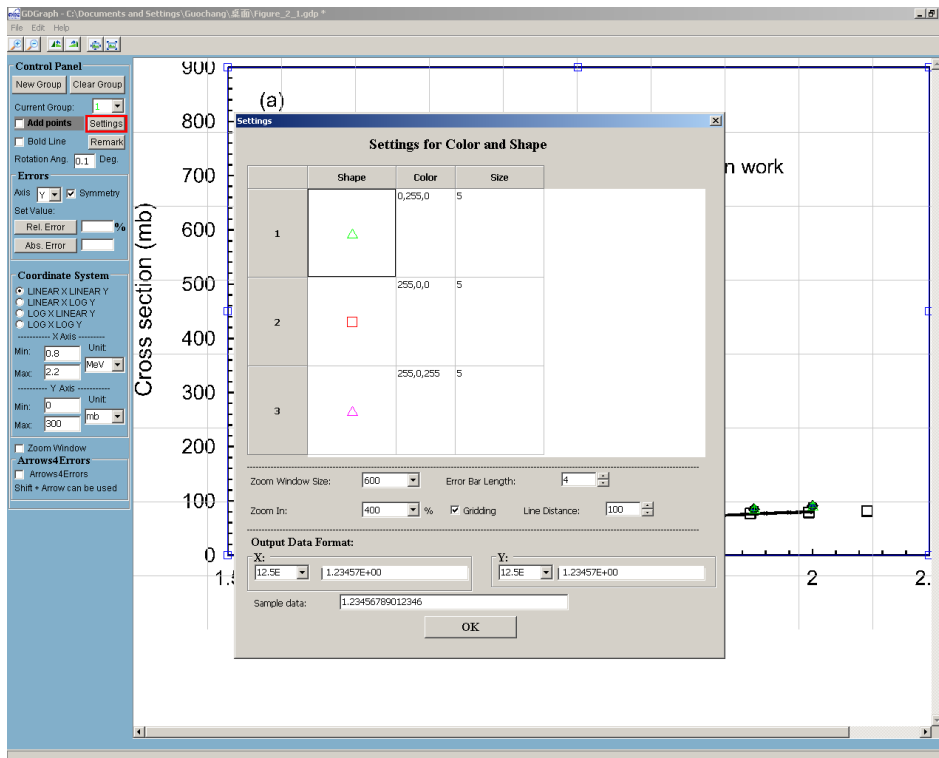


Figure 4.1 Window of "Setting" function. User can set the shape, size and color of data point, output data format, magnifying window, magnified times etc.

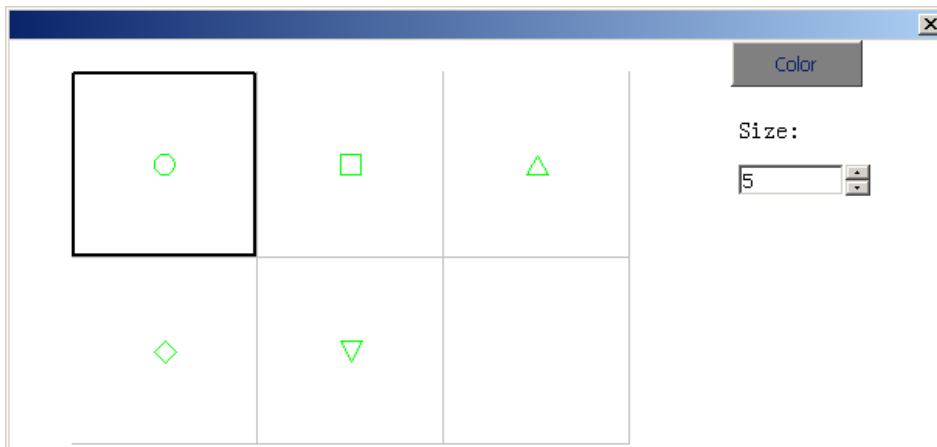


Figure 4.2 Window of setting shape, color and size of data point.

4.2 Data format and Remark

You can set digitizing output data format using "Settings" in the "Edit" menu as Figure 4.1. Each group data output contains 6 components such as X, Y, Y-Err+, Y-Err-, X-Err-, and X-Err+. You can set output format as exponent or floating format

and the number of digits is as the example in "Setting" window by user. And you can select one of listed format or enter a new data format at combo box. For setting the output data format in "Settings" window, there include two part contents of each setting, first part is to set the output format of X, Y and their errors, and the second part is the output example according to the format setting and sample data as shown in Figure 4.3. The sample data can be fill by user.

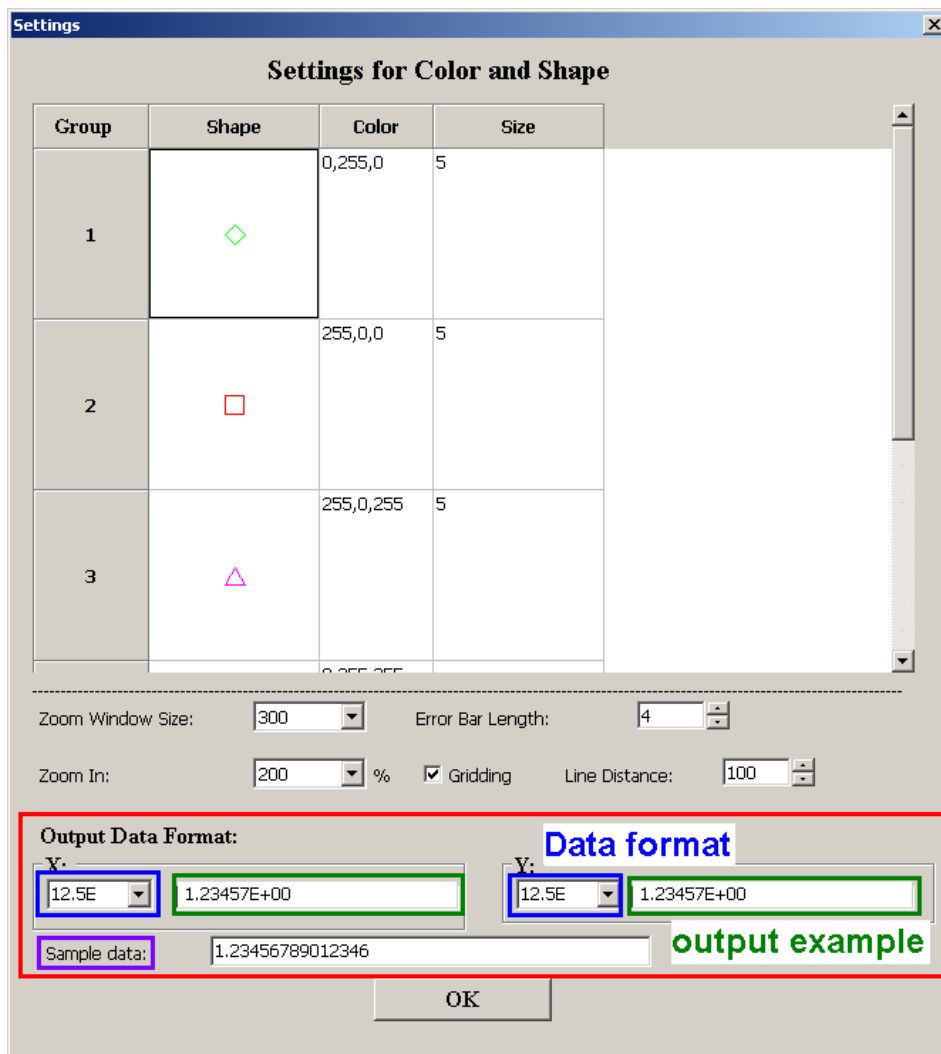


Figure 4.3 Set the data format and output example.

GDGraph provide a "Remark function" for user to keep some memo text in digitizing process. You can use "Remark" in the "Edit" menu, "Remark" button at "Control panel" or keyboard shortcut "Ctrl+K" to active remark function, and there will appear a new window for entering and editing what you want for memo as shown in

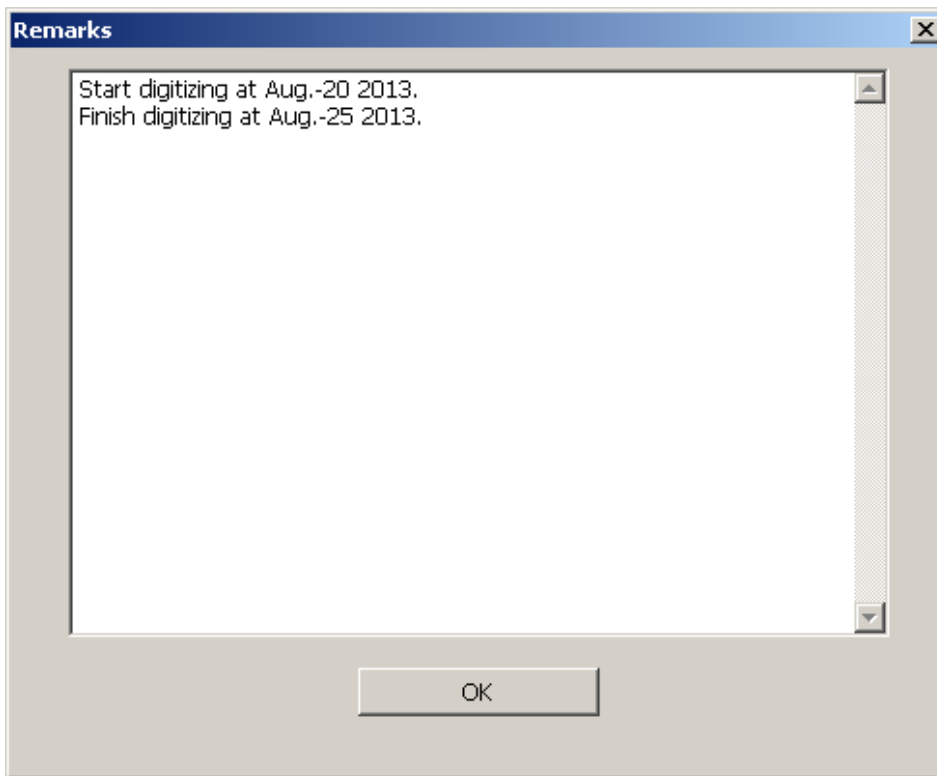


Figure 4.4 Window of "Remark" function for filling some text of memo.

Figure 4.4. Then close this window when you finish typing to keep your comments and memo. When you want to modify your remark, please use the same way as above mentioned to open and edit it.

4.3 Keyboard shortcuts

The correspondence between keyboard shortcuts and the buttons on the control bar and menu in the menu bar is shown in Table 4.1. The shortcut key have not the upper or lower letter limitation.

<u>Operation</u>	<u>Key</u>
Create a new digitizing project	Ctrl+N
Open a window to load a digitizing project	Ctrl+O
Open a window to save a digitizing project	Ctrl+S
Open a window to save a project as other name	Ctrl+A
Open a window to load an image file	Ctrl+L
Open a window to import a numerical data file	Ctrl+I
Save the digitizing result as a numerical data file	Ctrl+S
Paste an image to main panel or digitizing result to applications	Ctrl+V
Copy the digitizing result to clipboard	Ctrl+C
Start the setting function	Ctrl+E
Make a memo for present digitizing work	Ctrl+K
Activate the next digitizing point	PageDown
Activate the previous digitizing point	PageUp
<u>Arrows&Errors Activated</u>	
Symmetry condition	
Increase X error	←
Decrease X error	→
Increase Y error	↑
Decrease Y error	↓
Asymmetry condition	
Increase/Decrease X-Err- error	← / →
Increase/Decrease X-Err+ error	Shift+→ / Shift+←
Increase/Decrease Y-Err- error	Shift+↓ / Shift+↑
Increase/Decrease Y-Err+ error	↑ / ↓

4.4 ChangeLog

↳ Changes in Version 2.0 with respect to 1.0 (2006)

1. The graphics can be opened including mostly image format such as PNG, GIF, BMP and JPEG etc.
2. The image can be zoom-in and zoom-out.
3. The image can be rotated, so the digitizing axes can fit well with the image one.
4. The image size can automatically fit to the GUI main panel window.
5. Using a new button to revert image size as original one, when the image is been zoom-in or zoom-out.
6. Allow to add and delete a data group. The maximum number of data group is three and represent as blue, red and green color, respectively.
7. Allow to randomly add and move the digitizing point by a mouse.
8. Digitizing data can be saved as a data file or at clipboard and paste to other applications.
9. Allow to digitize y error under asymmetry mode only using a mouse.
10. Allow to set fix value for y error using relative (% , in percent) or absolute mode.

↳ Changes in Version 3.0 with respect to 2.0 (2011)

1. Allow to copy image directly from other application file such as MS Word, PDF, etc.
2. Allow to select thin or thick line mode for axes, data symbol and error bar etc.
3. Except for the image rotation function, there are allow user to set a rotation angle (in degree) to realize slight rotation.
4. Add magnifying glass function with fix window size and magnified times. Partially zoom-in of the active point is available for checking and modifying the position of digitizing point.
5. The digitizing axes and image can be zoom-in and zoom-out together.
6. Allow to move the digitizing point by cursor keys for slightly adjusting the position.

🔗 Changes in Version 4.4 with respect to 3.0 (2012)

1. Digitizing X error is available, and allow to digitize X-Y error using cursor keys.
2. Add Project and Remark function. The Project function allows to save image, digitizing results, axes together with other settings for checking, correction, modification in the future. And the extension filename of project is "rpp". The Remark function allows to fill some marks and memo text for checking, modification and memory.
3. Add Setting function, so change the color, size and shape of digitizing point is available. The size of magnifying glass window is allowed to set. Allow to change the partial image magnified times in the magnifying glass window from 200% to 400% for obtaining more clear point image. Allow to change the length of error bar cross line to clearly compare with the data point error bar in image. A background with or without gridding lines is available, and allow to set the distance of gridding line.
4. Allow to move magnifying glass window by mouse.

🔗 Changes in Version 5.0 with respect to 4.4 (2013)

1. Language: Chinese → Chinese & English
2. GUI interface type: Dialogue → SDI (Single document interface).
3. Modify the function "Project" to reduce the project file size and memory requirement. The extension filename is changed from "rpp" to "gdp".
4. X, Y Error includes symmetry and asymmetry mode.
5. X, Y Error can set in absolute or relative value by user, respectively.
6. X, Y axes: Unit setting for X, Y data by user is available.
7. The import data function is available, and enable to reuse the former digitizing data or compare with other data group easily.
8. Output data as X4 format is available as setting the output data format using $11.xE$ or $11.xF$. And user is allowed to set the number of digits of output numerical data in "Settings" function.
9. To use shortcut key to select the active point by "PageUp" or "PageDown" as previous or next point.

10. Allow to change the X, Y error bar by cursor keys.

Bibliography

- [1] Chen Guochang, Jin Yongli, Wang Jimin, **Introduction of the Digitization Software GDGraph**, INDC(NDS)-0629, 27-28, 2013.

Nuclear Data Section
International Atomic Energy Agency
P.O. Box 100
A-1400 Vienna
Austria

e-mail: nds.contact-point@iaea.org
fax: (43-1)26007
telephone: (43-1)2600-21710
web: <http://www-nds.iaea.org/>
